

**HFM-24**  
**HFM-30**  
**HFM-48**  
**HFM-72**  
**Hot Food Module**



**HFM-72**



• Halo Heat . . . a controlled, uniform heat source that radiates a gentle heat from the shelf base.

- Front-of-the-house use with an existing counter, overhead lighting, and sneeze guard system, or drop into a prep table for hot food plating convenience.
- Combine the beauty and durability of customer supplied solid surface material for an impressive display of hot food products.
- Perfect for hot hors d'oeuvres or pizza.
- Easy drop-in installation design.
- Stainless steel exterior panels.

Exterior side panels of 18 gauge stainless steel. An ON/OFF thermostat control is attached to the heated base with a 30" (762mm) flexible, water-tight extension for built-in installations and can be mounted in a convenient location for the operator. The hot food module is controlled by one (1) ON/OFF switch and one (1) adjustable thermostat with a range of 1 through 10 with one (1) indicator light. Customer supplied solid surface material insert provides even heat transfer to hot foods being held in direct contact with the heated surface.

**HFM-24** - 24" (610mm) wide

**HFM-30** - 30" (762mm) wide

**HFM-48** - 48" (1219mm) wide

**HFM-72** - 72" (1829mm) wide



**Factory Installed Options**

• Voltage Choices

208V

230V




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.  
 Phone: 262.251.3800 800.558.8744 U.S.A./CANADA Fax: 262.251.7067 800.329.8744 U.S.A. only  
[www.alto-shaam.com](http://www.alto-shaam.com)



# HFM-24, HFM-30, HFM-48, HFM-72

Hot Food Module

## HFM SERIES SIDE VIEW

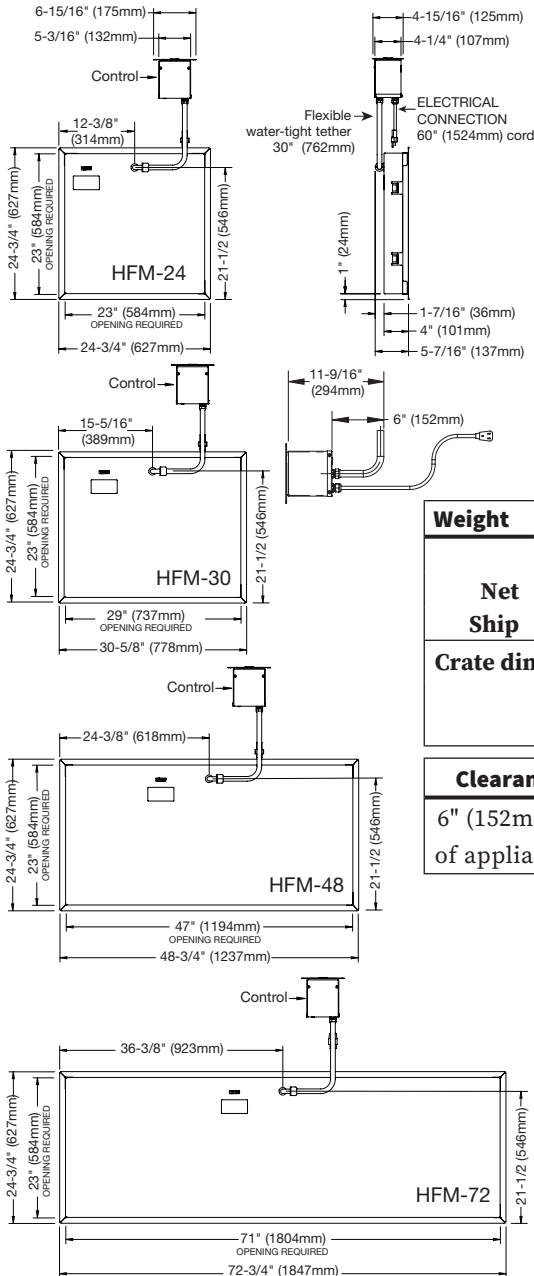

### Dimensions: L x W x D

<b>HFM-24</b>	<b>Exterior:</b> 24-3/4" x 24-3/4" x 5-7/16" (627mm x 627mm x 137mm)
	<b>Surface material:</b> 22-3/8" x 22-3/8" x 3/4" (568mm x 568mm x 19mm)
	<b>Opening required (L x W):</b> 23" x 23" (584mm x 584mm)
<b>HFM-30</b>	<b>Exterior:</b> 30-5/8" x 24-3/4" x 5-7/16" (778mm x 627mm x 137mm)
	<b>Surface material:</b> 28-3/8" x 22-3/8" x 3/4" (721mm x 569mm x 19mm)
	<b>Opening required (L x W):</b> 29" x 23" (737mm x 584mm)
<b>HFM-48</b>	<b>Exterior:</b> 48-3/4" x 24-3/4" x 5-7/16" (1237mm x 627mm x 137mm)
	<b>Surface material:</b> 46-3/8" x 22-3/8" x 3/4" (1178mm x 569mm x 19mm)
	<b>Opening required (L x W):</b> 47" x 23" (1194mm x 584mm)
<b>HFM-72</b>	<b>Exterior:</b> 72-3/4" x 24-3/4" x 5-7/16" (1847mm x 627mm x 137mm)
	<b>Surface material:</b> 70-3/8" x 22-3/8" x 3/4" (1788mm x 569mm x 19mm)
	<b>Opening required (L x W):</b> 71" x 23" (1803mm x 584mm)
<b>Control box cutout required:</b> 4-1/2" x 5-1/2" x 11-9/16" (115mm x 140mm x 294mm)	

### Weight

	HFM-24	HFM-30	HFM-48	HFM-72
<b>Net</b>	39 lb (18 kg)	53 lb (24 kg)	60 lb (27 kg)	88 lb (40 kg)
<b>Ship</b>	104 lb (47 kg)	118 lb (54 kg)	130 lb (59 kg)	175 lb (79 kg)

### Crate dimensions: (L x W x H)

36" X 36" X 17" (914 X 914 X 432mm)	36" X 36" X 17" (914 X 914 X 432mm)	60" X 34" X 13" (1524 X 864 X 330mm)	79" X 34" X 13" (2007 X 864 X 330mm)
--	--	---	---

### Clearance requirements

6" (152mm) from bottom of appliance.

### Electrical

#### HFM-24

V	Ph	Hz	A	kW	
208	1	60	3.2	0.65	NEMA 6-15P 15A, 250V plug
230	1	50/60	3.4	0.78	CEE 7/7* Plug rated 250V

#### HFM-30

V	Ph	Hz	A	kW	
208	1	60	2.8	0.62	NEMA 6-15P 15A, 250V plug
230	1	50/60	3.4	0.83	CEE 7/7* Plug rated 250V

#### HFM-48

V	Ph	Hz	A	kW	
208	1	60	6.4	1.3	NEMA 6-15P 15A, 250V plug
230	1	50/60	7.1	1.6	CEE 7/7* Plug rated 250V

#### HFM-72

V	Ph	Hz	A	kW	
208	1	60	9.7	1.99	NEMA 6-15P 15A, 250V plug
230	1	50/60	10.6	2.4	CEE 7/7* Plug rated 250V

\*Additional 230V plugs available



CH2-16P  
Plug rated 250V



BS1363  
Plug rated 250V

### Installation requirements

- Unit must be installed level.
- It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Customer supplied solid surface material must be rated to withstand temperatures of 300°F (148°C). Material must be 3/4" (19mm) thickness, 3/8" (10mm) radius corners and 1/8" (3mm) top and bottom edge. Edges must be polished. Contact Alto-Shaam for additional information.

### Accessories

- Cutting Board (for placement on top of surface material) BA-2054  
24" (610mm) H x 18" (470mm) W x 1/2" (13mm) D



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.  
Phone: 262.251.3800 800.558.8744 U.S.A./Canada Fax: 262.251.7067 800.329.8744 U.S.A. only  
www.alto-shaam.com